

# COMPACT CYLINDERS TANDEM AND MULTI-POSITION VERSIONS

## SERIES 32

Double-acting, magnetic  
 Ø 25, 40, 63, 100 mm



- In compliance with ISO 21287
- Compact design
- Wide range of models available in different diameters

Thanks to their great compactness Series 32 cylinders, Tandem and Multi-position, are suitable to be installed within confined spaces and can be used with the same mounting elements of other standard cylinders ISO15552. The Tandem version enables to obtain up to 2 times the thrust force of a normal cylinder (standard traction force), while the Multi-position version can obtain up to three positions with one cylinder only.

### General Data

<b>Construction</b>	Compact profile
<b>Operation</b>	Double-acting, magnetic
<b>Material</b>	Body and end-blocks = anodized AL Rod = rolled stainless steel AISI 303 Piston = anodized AL Rod seal, OR end-block and piston seal = PU
<b>Mounting</b>	With threaded holes on the end blocks Flange - feet - trunnion
<b>Strokes min. and max. (Tandem)</b>	Ø25 = 5-80 mm Ø40 - 63 - 100 = 5-100 mm
<b>Strokes min. and max. (Multi-position)</b>	Ø25 = max. 300 mm (dimension X2) Ø40 - 63 = max. 400 mm (dimension X2) Ø100 = max. 500 mm (dimension X2)
<b>Operating temperature</b>	0°C + 80°C (with dry air -20°C)
<b>Operating pressure</b>	1 ÷ 10 bar
<b>Fluid</b>	Clean air, without lubrication. If lubricated air is used, it is recommended to use oil ISOVG32. Once applied the lubrication should never be interrupted.
<b>Operating speed</b>	10 ÷ 1000 mm/sec (without load)

**COMPACT CYLINDERS TANDEM AND MULTI-POSITION VERSIONS**  
**SERIES 32 - CODING EXAMPLES**

PNEUMATIC ACTUATION

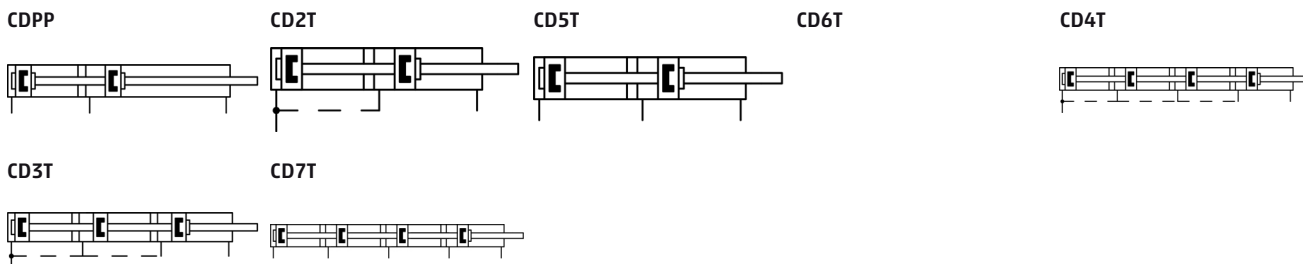
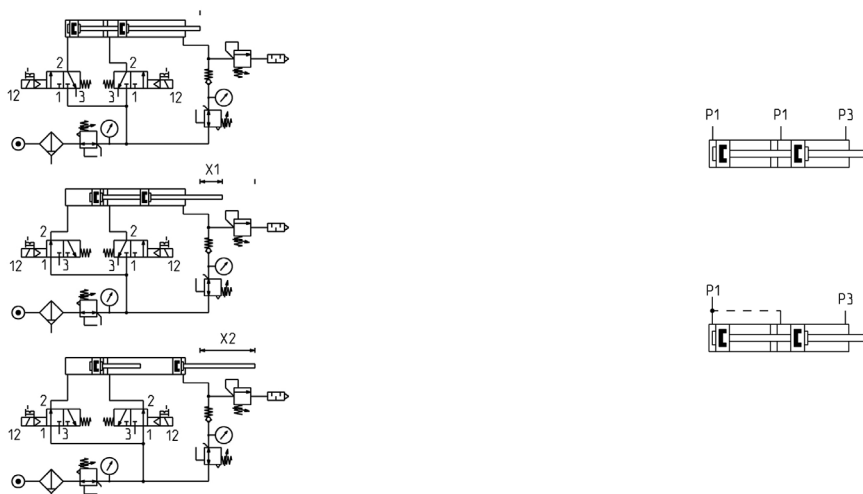
1

**Coding Examples**

<b>32</b>	<b>M</b>	<b>2</b>	<b>A</b>	<b>040</b>	<b>A</b>	<b>050</b>	<b>N</b>	<b>2</b>
<b>32</b>	SERIES compact magnetic							
<b>M</b>	VERSION M = male rod thread, mounted with rod nut Mod. U F = female rod thread							
<b>2</b>	OPERATION 2 = double-acting							<b>PNEUMATIC SYMBOLS</b> CDPP
<b>A</b>	MATERIALS A = anodized aluminium profile, end blocks and piston PU seals (rod - OR end block and piston)							
<b>040</b>	BORE 025 = 25 mm 040 = 40 mm 063 = 63 mm 100 = 100 mm							<b>CD5T, CD6T, CD7T</b> CD5T, CD6T, CD7T CD2T, CD3T, CD4T CD5T, CD6T, CD7T
<b>A</b>	CONSTRUCTION A = standard							
<b>050</b>	STROKE - Tandem stroke in mm - Multi-position X1mm/X2mm. Insert the strokes without the initial 0 (see application scheme)							
<b>N</b>	Tandem and Multi-position							
<b>2</b>	STAGES (for Tandem version only) 2 = 2 stages							

**Pneumatic symbols**

The pneumatic symbols which have been indicated in the CODING EXAMPLE are shown below.

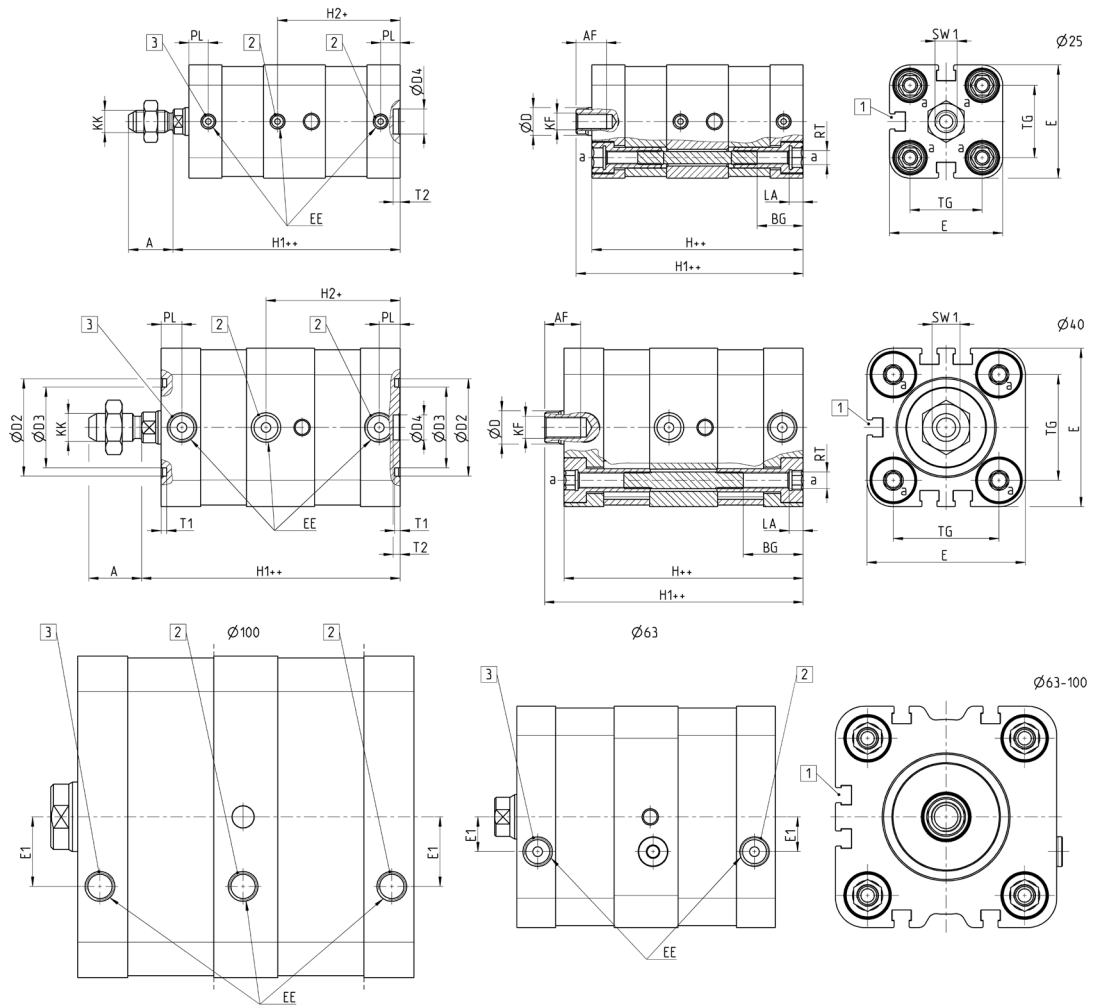

**Operation scheme**

**Multi-position**  
 Example for ordering:  
 X1 = 25 mm and X2 = 100 mm  
 31M2A032A25/100N

**Tandem, stroke = 50 mm - Example: 32M2A040A050N2**  
 In order to increase the speed of the rod's return, it is possible to remove the covers from the intermediate end caps and supply the positive chambers from the outside

**Tandem cylinders Mod. 32F2A/32M2A...N2**

PNEUMATIC ACTUATION

**1**



- + = add the stroke
- ++ = add the stroke two times
- 1 = Groove for sensor
- 2 = Positive stroke
- 3 = Negative stroke

∅	A	AF	BG	∅D	∅D2	∅D3	∅D4	E	EE	E1	H	H1	H2	KF	KK	LA	PL	RT	SW1	T1	T2	TG
25	16	11	16,5	10	-	-	9	40,7	M5	-	76	81,7	44	M6	M8x1,25	5	7	M5	8	-	2,5	26
40	19	13	21,5	12	35	29	9	57	G1/8	-	86	93	48,2	M8	M10x1,25	5	7,6	M6	10	2	2,5	38
63	22	16	18,5	16	45	39	12	79,6	G1/8	12,5	93	101	-	M10	M12x1,25	6	7,6	M8	13	2	3	56,5
100	28	20	20	25	55	49	12	115,6	G1/8	25	121	130,7	-	M12	M16x1,5	6	8	M10	22	2	3	89

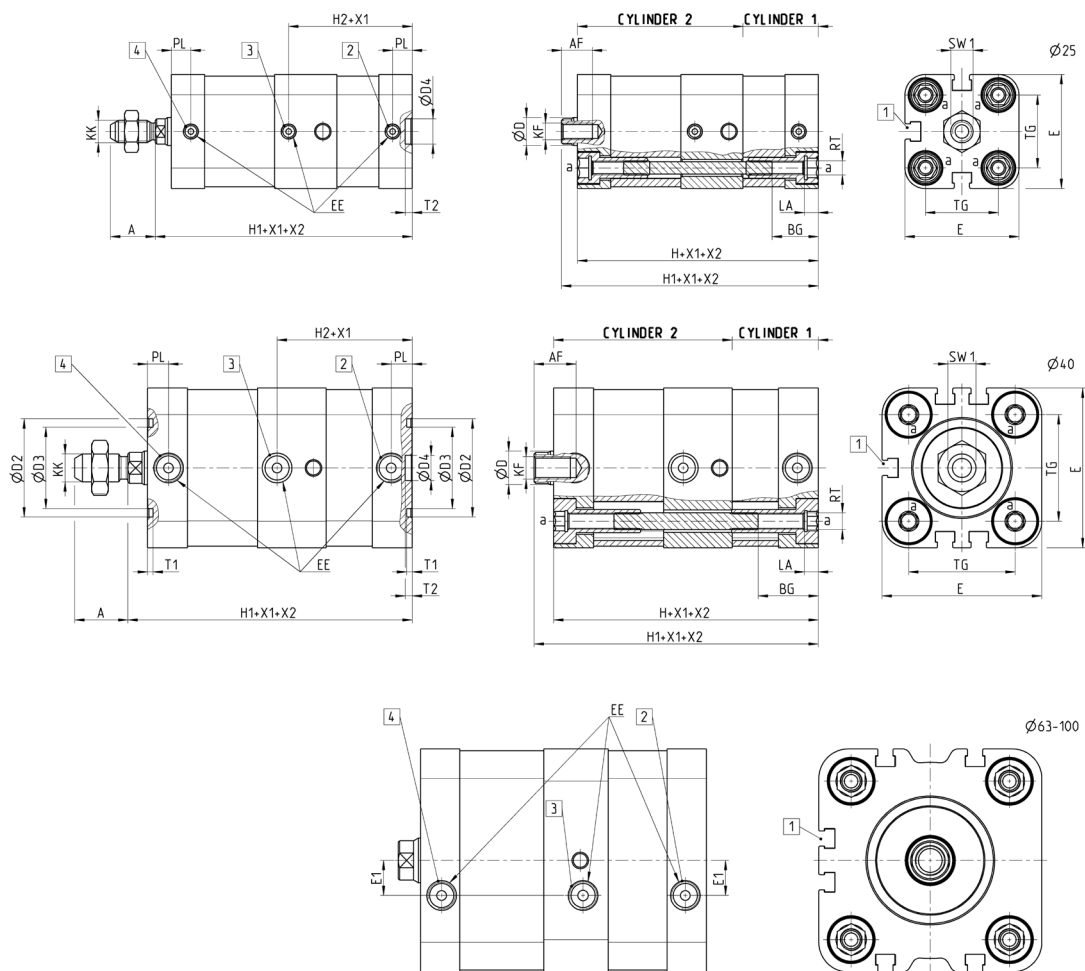
**Multi-position cylinders Mod. 32F2A/32M2A...X1/X2N**

- 1 = Groove for sensor
- 2 = Positive stroke cylinder 1
- 3 = Positive stroke cylinder 2
- 4 = Negative stroke for both cylinders



PNEUMATIC ACTUATION

1



X1 = Partial stroke  
 X2 = Total stroke as operation scheme

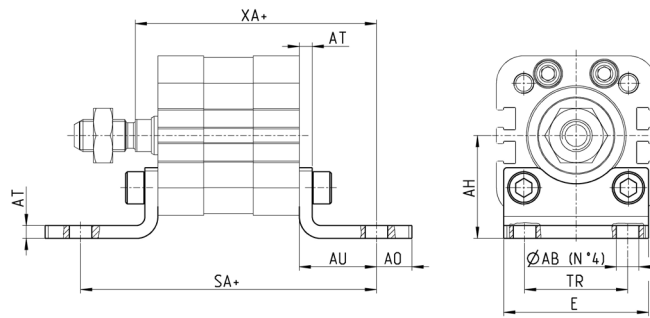
∅	A	AF	BG	$\varnothing_D$	$\varnothing_{D2}$	$\varnothing_{D3}$	$\varnothing_{D4}$	E	EE	E1	H	H1	H2	KF	KK	LA	PL	RT	SW1	T1	T2	TG
25	16	11	16,5	10	-	-	9	40,7	M5	-	76	81,7	44	M6	M8x1,25	5	7	M5	8	-	2,5	26
40	19	13	21,5	12	35	29	9	57	G1/8	-	86	93	48,2	M8	M10x1,25	5	7,6	M6	10	2	2,5	38
63	22	16	18,5	16	45	39	12	79,6	G1/8	12,5	93	101	44	M10	M12x1,25	6	7,6	M8	13	2	3	56,5
100	28	20	20	25	55	49	12	115,6	G1/8	25	121	130,7	60,5	M12	M16x1,5	6	8	M10	22	2	3	89

## Foot mount Mod. B



**Material:**  
zinc plated steel


Supplied with:  
2x feet mount  
4x screws



+ = add the stroke

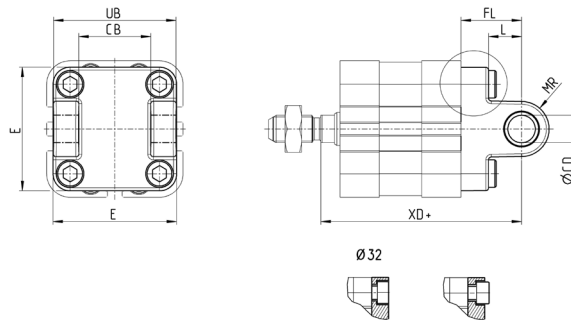
Mod.	Ø	Ø <sub>AB</sub>	AH	AO	AU	AT	E	TR	SA +	XA+
B-32-12	12	5,5	21	5	13	3	26	16	61	52,2
B-31-12-16	16	5,5	22	7	13	3	28	18	61	52,7
B-32-20	20	6,5	27	9	16	4	35	22	68,8	58,5
B-31-25	25	6,5	29	9	16	4	39	26	70,8	60,5
B-41-32	32	7	32	11	24	4	45	32	92	75
B-41-40	40	10	36	15	28	4	53,5	36	101	80
B-41-50	50	10	45	15	32	4	62,5	45	109	85
B-41-63	63	10	50	15	32	5	73	50	113	89
B-41-80	80	12	63	20	41	6	92	63	136	104,5
B-41-100	100	14,5	71	25	41	6	108,5	71	148,8	117,5
B-32-125	125	16,5	90	25	45	7	132	90	171	137

## Rear female trunnion Mod. C



**Material:**  
aluminium


Supplied with:  
1x female trunnion  
4x screws

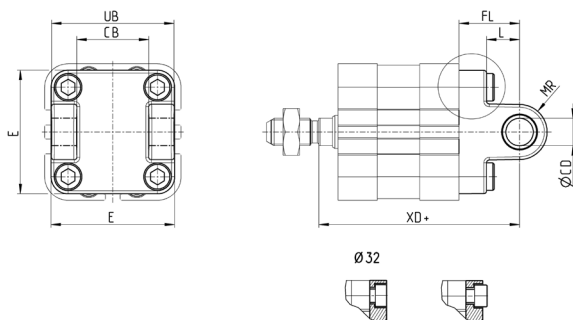


Mod.	Ø	Ø <sub>CD</sub>	E	CB	UB	L	FL	MR	XD+
C-41-32	32	10	47	26	46,5	12,5	22	10	73
C-41-40	40	12	52	28	52	16	25	12	77
C-41-50	50	12	64	32	60	16	27	12	80
C-H-41-63	63	16	74	40	70	21	32	16	89
C-H-41-80	80	16	94	50	90	22	36	16	99,5
C-H-41-100	100	20	114	60	110	27	41	20	117,5
C-H-32-125	125	25	140	70	130	30	50	25	142

COMPACT CYLINDERS TANDEM AND MULTI-POSITION VERSIONS  
**SERIES 32 - ACCESSORIES**


PNEUMATIC ACTUATION

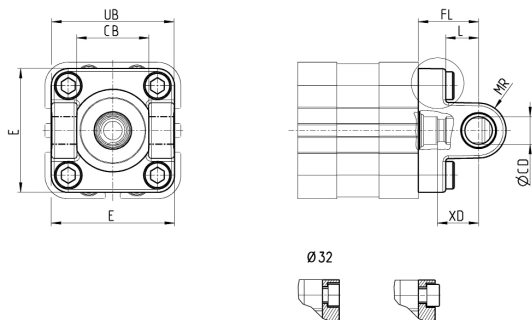
**1**
**Rear female trunnion Mod. C-H**

**Material:**  
aluminium

 Supplied with:  
1x female trunnion  
4x screws


+ = add the stroke


Mod.	Ø	ØCD	E	CB	UB	L	FL	MR	XD +
C-H-41-63	63	16	74	40	70	21	32	16	89
C-H-41-80	80	16	94	50	90	22	36	16	99,5
C-H-41-100	100	20	114	60	110	27	41	20	117,5
C-H-32-125	125	25	140	70	130	30	50	25	142

**Front female trunnion Mod. H**

**Material:**  
aluminium

 Supplied with:  
1x female trunnion  
4x screws


Mod.	Ø	ØCD	E	CB	UB	L	FL	MR	XD+
H-41-32	32	10	47	26	46,5	12,5	22	10	15
H-41-40	40	12	52	28	52	16	25	12	18
H-41-50	50	12	64	32	60	16	27	12	19
H-60-63	63	16	74	40	70	21	32	16	24
C-H-41-80	80	16	94	50	90	22	36	16	26,5
C-H-41-100	100	20	114	60	110	27	41	20	31,3
C-H-32-125	125	25	140	70	130	30	50	25	41

## Front flange Mod. D-E

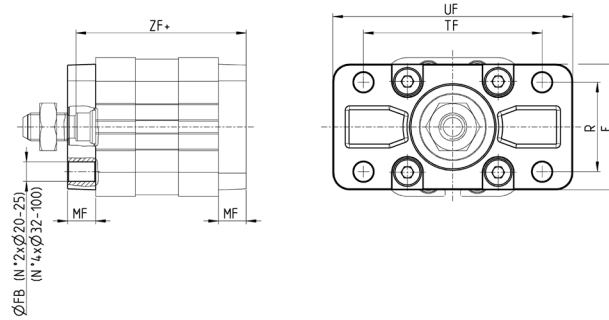


Material:  
zinc-plated steel for  $\varnothing 16 - \varnothing 25$ ;  
aluminium for  $\varnothing 32 \div \varnothing 125$ ;

Supplied with:  
1x flange  
4x screws

**Material:**  
zinc-plated steel for  $\varnothing 12 - \varnothing 25$ ;  $\varnothing 250$   
aluminium for  $\varnothing 32 \div \varnothing 200$   
stainless steel 304 for  $\varnothing 320$


Supplied with:  
1x flange  
4x screws



+ = add the stroke

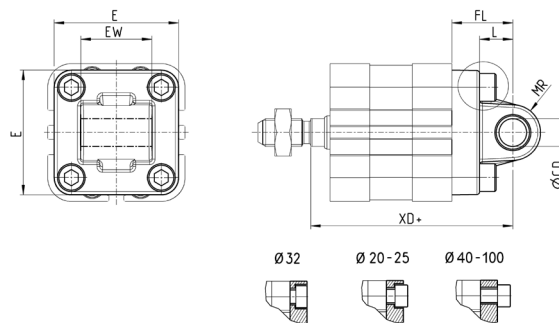
Mod.	$\varnothing$	$\varnothing_{FB}$	E	MF	R	TF	UF	ZF +
D-E-31-12-16	16	5,5	29	10	-	43	55	49,7
D-E-32-20	20	6,6	36	10	-	55	70	52,5
D-E-32-25	25	6,6	40	10	-	60	76	54,5
D-E-41-32	32	7	45	10	32	64	80	61
D-E-41-40	40	9	52	10	36	72	90	62
D-E-41-50	50	9	65	12	45	90	110	65
D-E-41-63	63	9	75	12	50	100	120	69
D-E-41-80	80	12	95	16	63	126	150	79,5
D-E-41-100	100	14	115	16	75	150	170	92,5
D-E-41-125	125	16	140	20	90	180	220	112

## Rear male trunnion Mod. L



**Material:**  
aluminium

Supplied with:  
1x male trunnion  
4x screws




+ = add the stroke

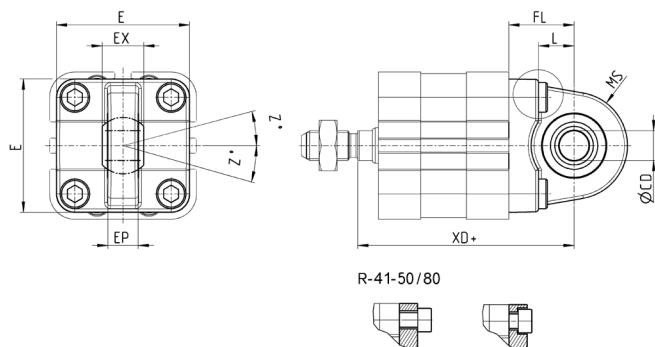
Mod.	$\varnothing$	$\varnothing_{CD}$	E	EW	L	FL	MR	XD +
L-31-12-16	16	6	30	12	10	16	6	55,7
L-32-20	20	8	34	16	14	20	8	62,5
L-32-25	25	8	38	16	14	20	8	64,5
L-41-32	32	10	47	26	12,5	22	10	73
L-41-40	40	12	52	28	16	25	12	77
L-41-50	50	16	64	32	16	27	12	80
L-41-63	63	16	74	40	21	32	15,5	89
L-41-80	80	20	94	50	22	36	16	99,5
L-41-100	100	20	114	60	27	41	20	117,5
L-32-125	125	25	140	70	30	50	25	142

**COMPACT CYLINDERS TANDEM AND MULTI-POSITION VERSIONS**  
**SERIES 32 - ACCESSORIES**
**Trunnion ball-joint Mod. R**

PNEUMATIC ACTUATION



**Material:**  
aluminium

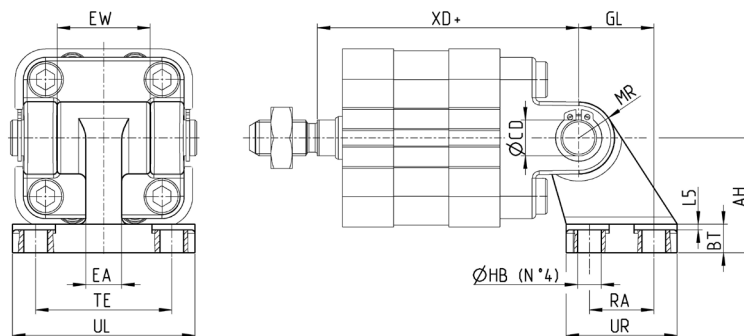
 Supplied with:  
1x trunnion ball joint  
4x screws

**1**


+ = add the stroke

Mod.	Ø	ØCD	E	EX	EP	L	FL	MS	XD+	Z°
R-41-32	32	10	45	14	10,5	12	22	16	73	4
R-41-40	40	12	52	16	12	15	25	19	77	4
R-41-50*	50	12	62,5	16	12	15	27	21	80	4
R-50	50	16	65	21	15	16	27	21,5	80	4
R-41-63	63	16	75	21	15	20	32	24	89	4
R-41-80*	80	16	92	21	15	24	36	28	99,5	4
R-80	80	20	95	25	18	22	36	28,5	99,5	4
R-41-100	100	20	115	25	18	27	41	30	117,5	4
R-41-125	125	30	140	37	25	30	50	40	142	4

**90° male trunnion Mod. ZC**

**CETOP RP 107P**
**Material:**  
aluminium

 Supplied with:  
1x male support


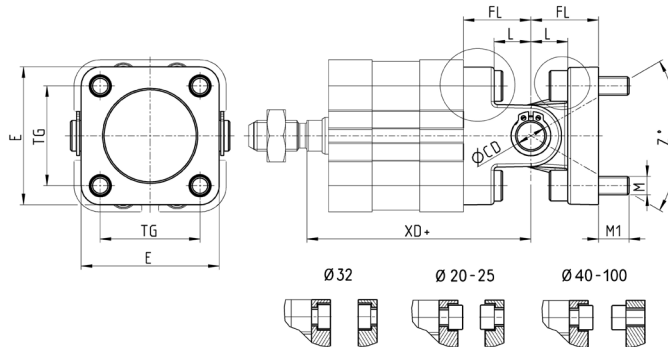
+ = add the stroke

Mod.	Ø	AH	BT	ØCD	EA	EW	GL	ØHB	L5	MR	RA	UL	UR	TE	XD+
ZC-32	32	32	8	10	10	26	21	6,6	1,6	10	18	51	31	38	73
ZC-40	40	36	10	12	15	28	24	6,6	1,6	11	22	54	35	41	77
ZC-50	50	45	12	12	16	32	33	9	1,6	13	30	65	45	50	80
ZC-63	63	50	14	16	16	40	37	9	1,6	15	35	67	50	52	89
ZC-80	80	63	14	16	20	50	47	11	2,5	15	40	86	60	66	99,5
ZC-100	100	71	17	20	20	60	55	11	2,5	19	50	96	70	76	117,5
ZC-125	125	90	20	25	30	70	70	14	3,2	22,5	60	124	90	94	142

### Accessory combination Mod. C+L+S



**Material:**  
aluminium



+ = add the stroke

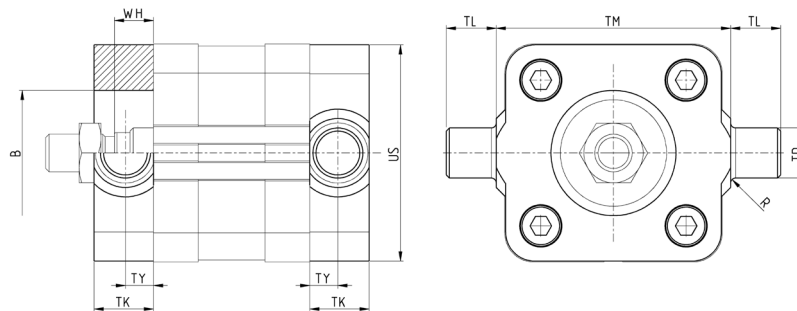
Mod.	Ø	g <sub>CD</sub>	E	L	FL	M	M1	TG	XD +	Z <sup>2</sup> (max)
I-41-32	32	10	47	12,5	22	M6	10,5	32,5	73	30
I-41-40	40	12	52	16	25	M6	10,5	38	77	40
I-41-50	50	12	64	16	27	M8	11,5	46,5	80	25
I-41-63	63	16	74	21	32	M8	13,5	56,5	89	36
I-41-80	80	16	93	22	36	M10	15	72	99,5	34
I-41-100	100	20	114	27	41	M10	15	89	117,5	38
I-41-125	125	30	140	30	50	M12	15	110	142	30

### Front spot faced trunnion Mod. FN



**Material:**  
zinc-plated steel


Supplied with:  
1x spot faced trunnion  
4x screws



Mod.	Ø	TK	TY	WH	g <sub>B</sub>	US	TL	TM	g <sub>TD</sub>	R
FN-32	32	14	6,5	7	30	46	12	50	12	1
FN-40	40	19	9	7	35	59	16	63	16	1,5
FN-50	50	19	9	8	40	69	16	75	16	1,6
FN-63	63	24	11,5	8	45	84	20	90	20	1,6
FN-80	80	24	11,5	9,5	45	102	20	110	20	1,6
FN-100	100	29	14	9,7	55	125	25	132	25	2
FN-125	125	30	15	11	60	150	25	160	25	2

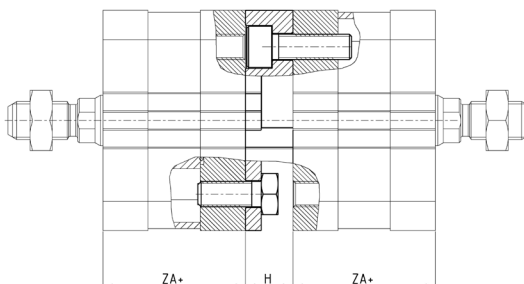
## Opposed cylinder coupler Mod. DC-32

PNEUMATIC ACTUATION

**1**

**Material:**  
 Aluminium

 Supplied with:  
 1x flange  
 2x hex head screws  
 2x cylindrical head screws  
 2x centering rings\*

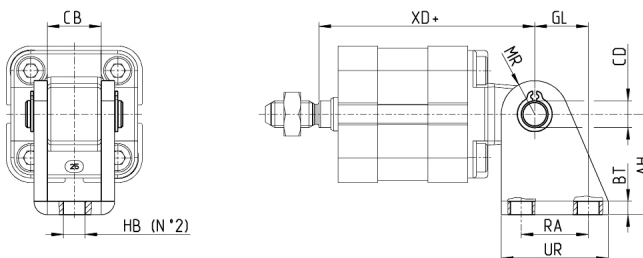
\*Only from Ø50 to Ø125



Mod.	Ø	ZA +	H
DC-32-20	20	36,8	13
DC-32-25	25	38,8	13
DC-32-32	32	44	15
DC-32-40	40	45	15
DC-32-50	50	45	15
DC-32-63	63	49	15
DC-32-80	80	54	17
DC-32-100	100	66,8	19,5
DC-32-125	125	81	19,5

## 90° swivel combination for trunnion Mod. I


**Material:**  
 zinc-plated steel

 Supplied with:  
 2x Seeger  
 1x female support  
 1x piston pin


+ = add the stroke

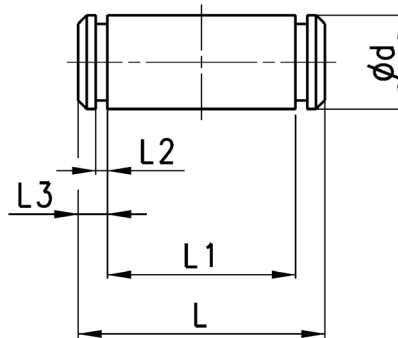
Mod.	Ø	AH	BT	øCD	CB	GL	øHB	MR	RA	UR	XD+
I-12-16	16	27	3	6	12,1	13	5,5	7	15	25	55,7
I-20-25	20	30	4	8	16,1	16	6,5	10	20	32	62,5
I-20-25	25	30	4	8	16,1	16	6,5	10	20	32	64,5

## Clevis pin Mod. S



**Materials:**  
Stainless steel Clevis pin,  
Steel Seeger

Supplied with:  
1x clevis pin  
2x seeger in steel




Mod.	Ø	ØD	L	L1	L2	L3
S-32	32	10	52	46	1,1	3
S-40	40	12	59	53	1,1	3
S-50	50	12	67	61	1,1	3
S-63	63	16	77	71	1,1	3
S-80	80	16	97	91	1,1	3
S-100	100	20	121	111	1,3	5
S-125	125	25	140,5	132	1,3	4,25

## Rod fork end Mod. G



ISO 8140

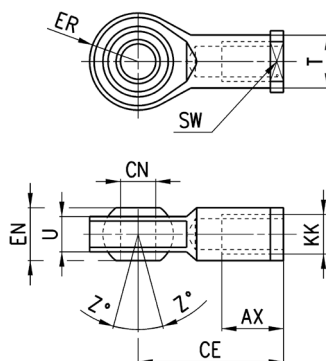
Material:  
zinc-plated steel



Mod.	Ø	ØCK	LE	CM	CL	ER	CE	KK	B	ØB1
G-12-16	16	6	6	6	12	7	24	M6X1	16	10
G-20	20-25	8	8	8	16	10	32	M8X1,25	22	14
G-25-32	32-40	10	10	10	20	12	40	M10X1,25	26	18
G-40	50-63	12	12	12	24	14	48	M12X1,25	32	20
G-50-63	80-100	16	16	16	32	19	64	M16X1,5	40	26
G-80-100	125	20	20	20	40	25	80	M20x1,5	48	34

## Swivel ball joint Mod. GA

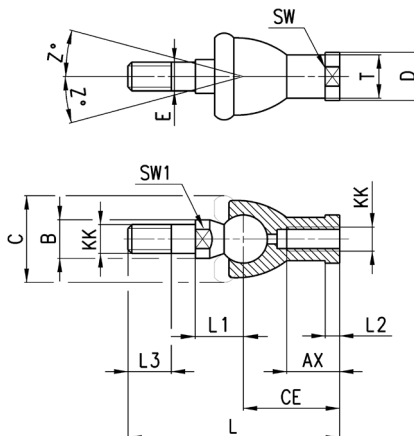

**ISO 8139**

 Material:  
 zinc-plated steel


Mod.	∅	$\varnothing_{CN}$	U	EN	ER	AX	CE	KK	$\varnothing_T$	Z	SW
GA-12-16	16	6	7	9	10	12	30	M6x1	10	6,5	11
GA-20	20 - 25	8	9	12	12	16	36	M8x1,25	12,5	6,5	14
GA-25-32	32 - 40	10	10,5	14	14	20	43	M10x1,25	15	6,5	17
GA-40	50 - 63	12	12	16	16	22	50	M12x1,25	17,5	6,5	19
GA-50-63	80 - 100	16	15	21	21	28	64	M16x1,5	22	7,5	22
GA-80-100	125	20	18	25	25	33	77	M20x1,5	27,5	7	30

## Piston rod socket joint Mod. GY


**ISO 8139**

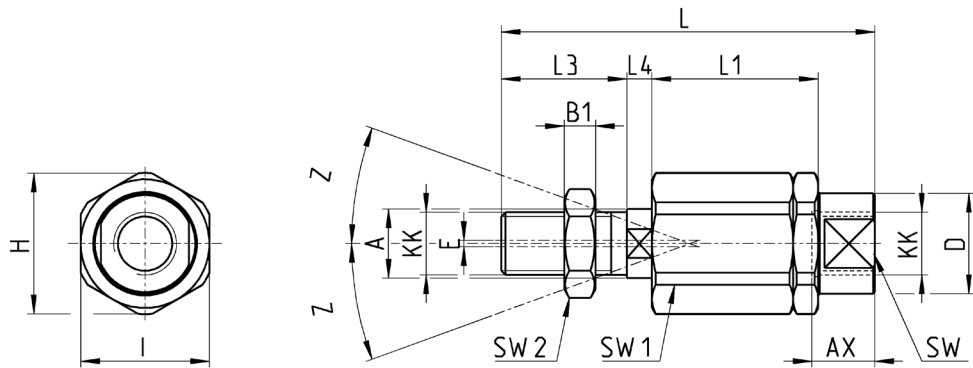
 Material:  
 zama and zinc-plated steel


Mod.	∅	KK	L	CE	L2	AX	SW	SW1	L1	L3	$\varnothing_T$	$\varnothing_D$	$\varnothing_E$	$\varnothing_B$	$\varnothing_C$	Z
GY-12-16	16	M6x1	55	28	5	15	11	8	12,2	11	10	13	6	10	20	15
GY-20	20-25	M8x1,25	65	32	5	16	14	10	16	12	12,5	13	6	10	20	15
GY-32	32-40	M10x1,25	74	35	6,5	18	17	11	19,5	15	15	19	10	14	28	15
GY-40	50-63	M12x1,25	84	40	6,5	20	19	17	21	17	17,5	22	12	19	32	15
GY-50-63	80-100	M16x1,5	112	50	8	27	22	19	27,5	23	22	27	16	22	40	11
GY-80-100	125	M20x1,5	133	63	10	38	30	24	31,5	25	27,5	34	20	27	45	7,5

## Self aligning rod Mod. GK



**Material:**  
zinc-plated steel

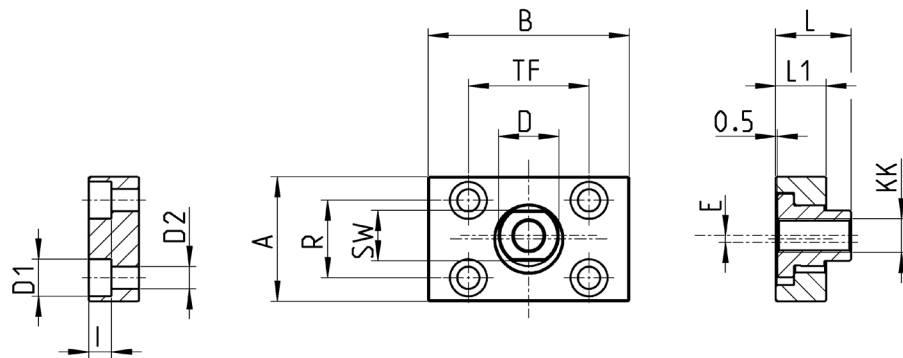


Mod.	∅	KK	L	L1	L3	L4	$\rho_A$	$\rho_D$	H	I	SW	SW1	SW2	B1	AX	Z	E
<b>GK-12-16</b>	16	M6X1	35	17,5	11	2,5	6	8,5	14,5	13	7	5	10	4	12,5	3	1
<b>GK-20</b>	20-25	M8X1,25	57	26	21	5	8	12,5	19	17	11	7	13	4	16	4	2
<b>GK-25-32</b>	32-40	M10X1,25	71,5	35	20	7,5	14	22	32	30	19	12	17	5	22	4	2
<b>GK-40</b>	50-63	M12X1,25	75,5	35	24	7,5	14	22	32	30	19	12	19	6	22	4	2
<b>GK-50-63</b>	80-100	M16X1,5	104	35	32	10	22	32	45	41	27	20	24	8	30	3	2
<b>GK-80-100</b>	125	M20x1,5	119	35	40	10	22	32	45	41	27	20	30	10	37	3	2

## Coupling piece Mod. GKF



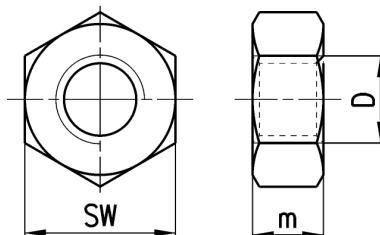
**Material:**  
zinc-plated steel



Mod.	∅	KK	A	B	R	TF	L	L1	I	$\rho_D$	$\rho_{D1}$	SW	E
<b>GKF-20</b>	20-25	M8X1,25	30	35	20	25	22,5	10	-	14	5,5	13	1,5
<b>GKF-25-32</b>	32-40	M10X1,25	37	60	23	36	22,5	15	6,8	18	11	15	2
<b>GKF-40</b>	50-63	M12X1,25	56	60	38	42	22,5	15	9	20	15	15	2,5
<b>GKF-50-63</b>	80-100	M16X1,5	80	80	58	58	26,5	15	10,5	25	18	22	2,5
<b>GKF-80-100</b>	125	M20X1,5	90	90	65	65	32,5	20	13	30,5	20	27	2,5

## Piston rod nut Mod. U


**UNI EN ISO 4035**

 Material:  
 zinc-plated steel


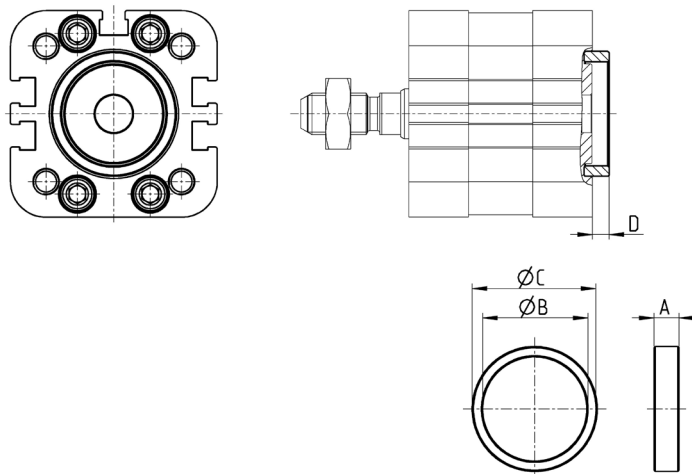
Mod.	Ø	D	M	SW
U-12-M5	12	M5x0,8	5	8
U-12-16	16	M6x1	4	10
U-20	20-25	M8x1,25	5	13
U-25-32	32-40	M10x1,25	6	17
U-40	50-63	M12x1,25	7	19
U-50-63	80-100	M16x1,5	8	24
U-80-100	125	M20x1,5	9	30

## Centring sleeve


**Supplied with:**  
 1x anodized AL centring ring

Designed for the centring of both rear and front end caps with brackets Mod. B/D-E/C/C-H/H/L/R, as for the centring of the cylinder while mounting.

Not suitable for 32CM and 32CF versions.






Mod.	Ø	A	ØB	ØC	D
TR-32-32	32	6	25	30	4
TR-32-40	40	6	30	35	4
TR-32-50	50	6	35	40	4
TR-32-63	63-80	7	40	45	5
TR-32-100	100	7	50	55	5

## Centring pin Mod. TS



**Material:**  
Anodized AL





Usable for size 12, 16, 20,  
25, 32, 40



**Mod.**

TS-32-20

## Magnetic proximity switches, ATEX "II 3 GD" certified, T-slot, straight

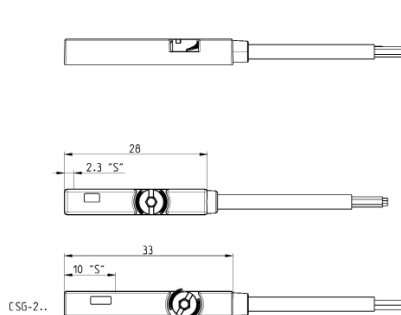



Mod.	Operation	Connection	Voltage	Output	Max. current	Max Load	Protection	L = cable length (m)	LED colour
CSG-223-2-EX	Reed NO	2 wires	5 ÷ 30 V AC/DC	-	100 mA	3 W	IP67	2	Red
CSG-223-5-EX	Reed NO	2 wires	5 ÷ 30 V AC/DC	-	100 mA	3 W	IP67	5	Red
CSG-233-2-EX	Reed NO	3 wires	10 ÷ 30 V AC/DC	-	500 mA	10 W	IP67	2	Yellow
CSG-233-5-EX	Reed NO	3 wires	10 ÷ 30 V AC/DC	-	500 mA	10 W	IP67	5	Yellow
CSG-324-2-EX	Magneto-resistive NO	2 wires	10 ÷ 28 V DC	-	50 mA	1,5 W	IP67	2	Red
CSG-324-5-EX	Magneto-resistive NO	2 wires	10 ÷ 28 V DC	-	50 mA	1,5 W	IP67	5	Red
CSG-334-2-EX	Magneto-resistive NO	3 wires	10 ÷ 28 V DC	PNP	200 mA	5,5 W	IP67	2	Yellow
CSG-334-5-EX	Magneto-resistive NO	3 wires	10 ÷ 28 V DC	PNP	200 mA	5,5 W	IP67	5	Yellow
CSG-534-2-EX	Magneto-resistive NO	3 wires	10 ÷ 28 V DC	NPN	200 mA	5,5 W	IP67	2	Red
CSG-534-5-EX	Magneto-resistive NO	3 wires	10 ÷ 28 V DC	NPN	200 mA	5,5 W	IP67	5	Red
CSG-734-2-EX	Magneto-resistive NC	3 wires	10 ÷ 28 V DC	NPN	200 mA	5,5 W	IP67	2	Red
CSG-734-5-EX	Magneto-resistive NC	3 wires	10 ÷ 28 V DC	NPN	200 mA	5,5 W	IP67	5	Red
CSG-634-2-EX	Magneto-resistive NC	3 wires	10 ÷ 28 V DC	PNP	200 mA	5,5 W	IP67	2	Yellow
CSG-634-5-EX	Magneto-resistive NC	3 wires	10 ÷ 28 V DC	PNP	200 mA	5,5 W	IP67	5	Yellow

Note for 2-wire switches Mod. CSG-223-2-EX, CSG-223-5-EX, CSG-324-2-EX, CSG-324-5-EX:  
in case of polarity reversing the sensor will still be operating, but the LED diode won't turn on.

**Magnetic proximity switches, UL certified, T-slot, straight**

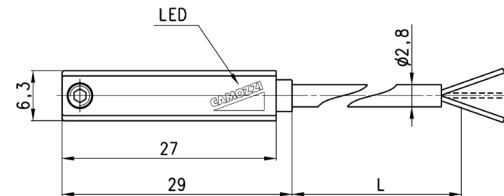

PNEUMATIC ACTUATION

**1**


Mod.	Operation	Connection	Voltage	Output	Max. current	Max Load	Protection	L = cable length (m)	LED colour
CSG-223-2-UL	Reed	2 wires	5 ÷ 30 V AC/DC	-	60 mA	1,8 W	IP67	2	Red
CSG-223-5-UL	Reed	2 wires	5 ÷ 30 V AC/DC	-	60 mA	1,8 W	IP67	5	Red
CSG-223-10-UL	Reed	2 wires	5 ÷ 30 V AC/DC	-	60 mA	1,8 W	IP67	10	Red
CSG-233-2-UL	Reed	3 wires	10 ÷ 30 V AC/DC	-	100 mA	3 W	IP67	2	Yellow
CSG-233-5-UL	Reed	3 wires	10 ÷ 30 V AC/DC	-	100 mA	3 W	IP67	5	Yellow
CSG-233-10-UL	Reed	3 wires	10 ÷ 30 V AC/DC	-	100 mA	3 W	IP67	5	Yellow
CSG-324-2-UL	Magneto-resistive	2 wires	10 ÷ 28 V DC	-	40 mA	1,2 W	IP67	2	Red
CSG-324-5-UL	Magneto-resistive	2 wires	10 ÷ 28 V DC	-	40 mA	1,2 W	IP67	5	Red
CSG-334-2-UL	Magneto-resistive	3 wires	10 ÷ 28 V DC	PNP	100 mA	3 W	IP67	2	Yellow
CSG-334-5-UL	Magneto-resistive	3 wires	10 ÷ 28 V DC	PNP	100 mA	3 W	IP67	5	Yellow
CSG-534-2-UL	Magneto-resistive	3 wires	10 ÷ 28 V DC	NPN	100 mA	3 W	IP67	2	Red
CSG-534-5-UL	Magneto-resistive	3 wires	10 ÷ 28 V DC	NPN	100 mA	3 W	IP67	5	Red

Note for 2-wire switches Mod. CSG-223-2-UL, CSG-223-5-UL, CSG-324-2-UL, CSG-324-5-UL:  
 in case of polarity reversing the sensor will still be operating, but the LED diode won't turn on.

## Magnetic proximity switches with 2 or 3 wire cable for T-slot

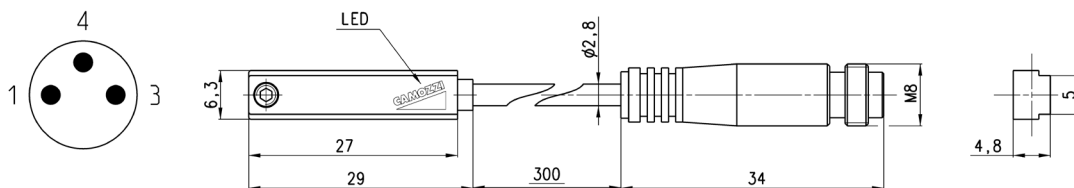



Mod.	Operation	Connections	Voltage	Output	Max. current	Max Load	Protection	L = length cable
CST-220	Reed	2 wires	10 ÷ 110 V AC/DC-230 V AC	-	250 mA	10 VA / 8 W	None	2 m
CST-220-5	Reed	2 wires	10 ÷ 110 V AC/DC-230 V AC	-	250 mA	10 VA / 8 W	None	5 m
CST-220-12	Reed	2 wires	10 ÷ 110 V AC/DC-230 V AC	-	250 mA	10 VA / 8 W	None	12 m
CST-220EX	Reed	2 wires	10 ÷ 110 V AC/DC-230 V AC	-	250 mA	10 VA / 8 W	None	2 m
CST-220-5EX	Reed	2 wires	10 ÷ 110 V AC/DC-230 V AC	-	250 mA	10 VA / 8 W	None	5 m
CST-220-12EX	Reed	2 wires	10 ÷ 110 V AC/DC-230 V AC	-	250 mA	10 VA / 8 W	None	12 m
CST-232	Reed	3 wires	5 ÷ 30 V AC/DC	PNP	250 mA	10 VA / 8 W	Against polarity reversing	2 m
CST-232-5	Reed	3 wires	5 ÷ 30 V AC/DC	PNP	250 mA	10 VA / 8 W	Against polarity reversing	5 m
CST-232EX	Reed	3 wires	5 ÷ 30 V AC/DC	PNP	250 mA	10 VA / 8 W	Against polarity reversing	2 m
CST-232-5EX	Reed	3 wires	5 ÷ 30 V AC/DC	PNP	250 mA	10 VA / 8 W	Against polarity reversing and overvoltage	5 m
CST-332	Magneto-resistive	3 wires	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage	2 m
CST-332-5	Magneto-resistive	3 wires	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage	5 m
CST-332EX	Magneto-resistive	3 wires	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage	2 m
CST-332-5EX	Magneto-resistive	3 wires	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage	5 m
CST-432	Reed	3 wires	5 ÷ 30 V AC/DC	PNP-NC	250 mA	10 VA / 8 W	Against polarity reversing	2 m
CST-432-5	Reed	3 wires	5 ÷ 30 V AC/DC	PNP-NC	250 mA	10 VA / 8 W	Against polarity reversing	5 m
CST-432EX	Reed	3 wires	5 ÷ 30 V AC/DC	PNP-NC	250 mA	10 VA / 8 W	Against polarity reversing	2 m
CST-432-5EX	Reed	3 wires	5 ÷ 30 V AC/DC	PNP-NC	250 mA	10 VA / 8 W	Against polarity reversing	5 m
CST-532	Hall effect	3 wires	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage	2 m
CST-532-5	Hall effect	3 wires	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage	5 m
CST-532EX	Hall effect	3 wires	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage	2 m
CST-532-5EX	Hall effect	3 wires	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage	5 m

Note for 2-wire switches Mod. CST-220, CST-220-5:  
in case of polarity reversing the sensor will still be operating, but the LED diode won't turn on.

**Magnetic proximity switches with M8 3-pin connector for T-slot**

PNEUMATIC ACTUATION

**1**


Cable length: 0,3 m

Mod.	Operation	Connection	Voltage	Output	Max. current	Max Load	Protection
CST-250N	Reed	2 wires M8 male 3 pin	10 ÷ 110 V AC/DC	-	250 mA	10 VA / 8 W	None
CST-250NEX	Reed	2 wires M8 male 3 pin	10 ÷ 110 V AC/DC	-	250 mA	10 VA / 8 W	None
CST-262	Reed	3 wires M8 male 3 pin	5 ÷ 30 V AC/DC	PNP	250 mA	10 VA / 8 W	Against polarity reversing
CST-262EX	Reed	3 wires M8 male 3 pin	5 ÷ 30 V AC/DC	PNP	250 mA	10 VA / 8 W	Against polarity reversing
CST-362	Magneto-resistive	3 wires M8 male 3 pin	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage
CST-362EX	Magneto-resistive	3 wires M8 male 3 pin	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage
CST-562	Hall effect	3 wires M8 male 3 pin	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage
CST-562EX	Hall effect	3 wires M8 male 3 pin	10 ÷ 27 V DC	PNP	100 mA	6 W	Against polarity reversing and overvoltage

 Note for 2-wire switch Mod. CST-250N:  
 in case of polarity reversing the sensor will still be operating, but the LED diode won't turn on