
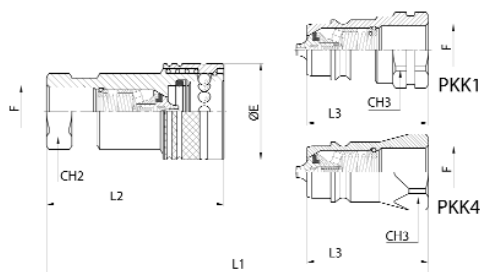


PKK1, PKK4 Hydraulic Probes - for Connection Under Pressure

Application: The main feature of these male couplings is that they can be connected to the female even if there is residual pressure in the circuit. This makes them suitable for agricultural applications, and in any hydraulic circuits affected by this type of problem. PAV1 PPV3 SCB compatible.

ISO A Norm

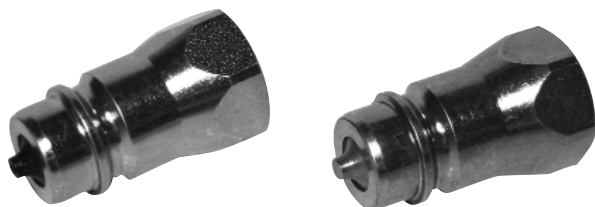

Technical Data

Characteristics

These male couplings are available in all versions and with all threads, standard (PAV) and push-pull (PPV). PKK 4 Ford Shape

Material

See page 8.00/006

Operating and Burst Pressures

See table page 8.00/006

Operating Temperature

with standard seals -25°C to +125°C

Special Requests

For assistance, contact our technical office or your local Camozzi distributor.



See page 8.00/007 for Dust Caps

DN	ISO	CH2	CH3	øE	L1	L2	L3	Thread	Probe 1/2
13	12.5	27	27	38	96	70	48	1/2	PKK1.1313.003
13	12.5	27	27	38	96	70	48	1/2 NPT	PKK1.1313.013
13	12.5	27	27	38	96	70	48	RC 1/2	PKK1.1313.043
13	12.5	27	27	38	96	70	48	M 22x1.5	PKK1.1322.103
13	12.5	27	27	38	96	70	48	3/4 UNF	PKK4.1319.033
13	12.5	27	27	38	96	70	48	1/2	PKK4.1313.003