


GRIPFIT PUSH-IN FITTINGS

SERIES 7000 - COOLING

Tube external diameters: 6, 8, 10, 12, 16 mm
Fittings threads: ISO-228 BSPP (G1/8, G1/4, G3/8).

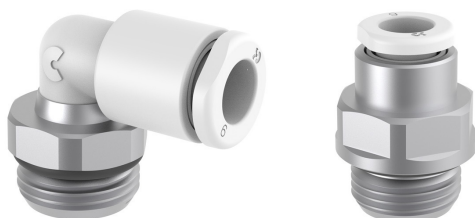

- Resistant to water pressure and erosion
- Dimensional stability with water contact
- Resistant to corrosion

Series 7000 Cooling push-in fittings have been designed with a special technopolymer based on bio-sourced renewable raw materials that allow the component to resist water absorption, temperature variations and liquid cooling additives.



ISO 14743:2020




Reach



RoHS

General Data


Diameter		Ø 6 mm	Ø 8 mm	Ø 10 mm	Ø 12 mm	Ø 16 mm
Maximum working pressure	- 20° / + 40°	16 bar	16 bar	16 bar	16 bar	16 bar
	+ 40° / + 70°	14 bar	12 bar	12 bar	10 bar	10 bar
	+ 70° / + 100°	12 bar	10 bar	10 bar	8 bar	8 bar
Minimum working pressure	-0,9 bar					
Temperature	- 20 ÷ + 100 (See characteristics of tubes used)					
Threads	GAS cylindrical ISO-228 BSPP					
Connecting tube	Polyurethane (PU), Polyethylene (PE), Polyamide (PA), Fluoropolymer (PTFE), Polyester (HY3L), rigid metal pipe with smooth grooved metal end					
Fluid	Industrial water and cooling fluids (for other fluids consult our technicians)					
Materials	(A) Body = Technopolymer (PA11), Brass with chemical nickel plating					
	(B) Button = Technopolymer (PA66)					
	(C) Gripping ring = Stainless steel (AISI 301)					
	(D) Seals = EPDM					
	(E) Thread = Brass with chemical nickel plating					

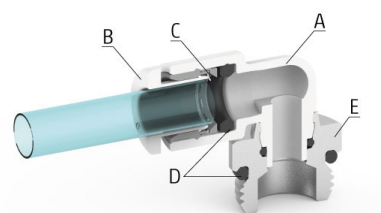

GRIPFIT PUSH-IN FITTINGS
SERIES 7000 - COOLING - DIMENSIONS

Male straight connector Mod. W6512


Chemical nickel-plated brass
Thread BSPP ISO-228



Mod.	A	D	C	F	G	H	L	SW	SW1	Weight [g]
W6512 6-1/8	6	G1/8	15,5	11,7	13,5	6	21	12	4	8
W6512 6-1/4	6	G1/4	15,5	11,7	16,4	7	22	15	4	11
W6512 8-1/8	8	G1/8	16,8	13,7	15,2	6	25,2	14	5	12
W6512 8-1/4	8	G1/4	16,8	13,7	16,4	7	24	15	6	14
W6512 8-3/8	8	G3/8	16,8	13,7	20,5	7	23,5	19	7	24
W6512 10-1/4	10	G1/4	19	15,9	18,5	7	28,5	17	7	22,5
W6512 10-3/8	10	G3/8	19	15,9	20,5	7	23,5	19	8	22,5
W6512 10-1/2	10	G1/2	19	15,9	24,8	8	24,5	22	8	37,5
W6512 12-3/8	12	G3/8	21,2	19,7	21,5	7	27	20	9	25
W6512 12-1/2	12	G1/2	21,2	19,7	24,8	8	27	22	9	38,5
W6512 16-1/2	16	G1/2	21,3	26	30	8	33	27	-	44
W6512 16-3/4	16	G3/4	21,3	26	30	9	32,5	27	-	60

Female straight connector Mod. W6463


Chemical nickel-plated brass
Thread BSPP ISO-228



Mod.	A	D	C	F	G	L	P [min]	SW	Weight [g]
W6463 6-1/8	6	G1/8	10	11,7	13	25,5	6	12	13
W6463 6-1/4	6	G1/4	11,5	11,9	16,5	27	7	15	21,5
W6463 8-1/8	8	G1/8	9,5	13,7	15,2	26,5	6	14	13,5
W6463 8-1/4	8	G1/4	11,5	13,7	16,5	28,5	7	15	20,5
W6463 8-3/8	8	G3/8	12,5	13,7	20,5	29,5	8	19	25
W6463 10-1/4	10	G1/4	11,5	15,9	18,5	30,5	7	17	26
W6463 10-3/8	10	G3/8	13	15,9	20	32	8	17	30,5
W6463 10-1/2	10	G1/2	17	15,9	24	36	9,5	17	42
W6463 12-3/8	12	G3/8	12,8	19,7	21,5	34	8	20	34
W6463 12-1/2	12	G1/2	16,8	19,7	23,8	51	9,5	20	50
W6463 16-1/2	16	G1/2	16,7	26	30	46	9,5	27	74
W6463 16-3/4	16	G3/4	16,7	26	30	46	11	27	94

Female plug Mod. W6750


Chemical nickel-plated brass



Mod.	A	G	L	Weight [g]
W6750 6	6	11,8	16,5	4,5
W6750 8	8	13,8	18	5,5
W6750 10	10	16	21	11
W6750 12	12	19,7	23,5	17
W6750 16	16	26	30,5	31

Male straight adaptor Mod. W6812


Chemical nickel-plated brass
Thread BSPP ISO-228



Mod.	D	G	H	L	T	SW	Weight [g]
W6812 6-1/8	G1/8	6	5,5	29,3	18	12	9
W6812 6-1/4	G1/4	6	7	31	18	14	12
W6812 8-1/8	G1/8	8	5,5	31,8	20,5	12	10,5
W6812 8-1/4	G1/4	8	7	33,5	20,5	14	14
W6812 8-3/8	G3/8	8	8	34,8	20,5	19	24
W6812 10-1/4	G1/4	10	7	37	23	15	17
W6812 10-3/8	G3/8	10	7	37	23	19	26
W6812 10-1/2	G1/2	10	8	39	23	22	36
W6812 12-3/8	G3/8	12	7	38	24	19	26,5
W6812 12-1/2	G1/2	12	8	40	24	22	38
W6812 16-1/2	G1/2	16	8	48	32	22	38,5
W6812 16-3/4	G3/4	16	9	50	32	27	54

Swivel male elbow Mod. W7522


Thread BSPP ISO-228



Mod.	A	D	E	G	H	M	SW	Weight [g]
W7522 6-1/8	6	G1/8	10	11,4	5	19	12	8
W7522 6-1/4	6	G1/4	10	11,4	6	19	14	11
W7522 8-1/8	8	G1/8	13,5	13,7	5	21	12	11
W7522 8-1/4	8	G1/4	12	13,7	6	21	14	14
W7522 8-3/8	8	G3/8	12	13,7	7	21	19	19
W7522 10-1/4	10	G1/4	14,5	16,3	6	25	14	16
W7522 10-3/8	10	G3/8	13,5	16,3	7	25	19	23,5
W7522 10-1/2	10	G1/2	13,5	16,3	8	25	24	33
W7522 12-3/8	12	G3/8	14,5	20	7	31	19	24
W7522 12-1/2	12	G1/2	15,5	20	8	31	24	34
W7522 16-1/2	16	G1/2	30	27	8	38	24	51
W7522 16-3/4	16	G3/4	24	27	9	38	30	60,5


Swivel male long elbow Mod. W7526

Thread BSPP ISO-228




Mod.	A	D	E	G	H	M	SW	Weight [g]
W7526 6-1/8	6	G1/8	23	11,4	5	19	12	13
W7526 6-1/4	6	G1/4	23	11,4	6	19	14	16
W7526 8-1/8	8	G1/8	29	13,7	5	21	12	18
W7526 8-1/4	8	G1/4	27	13,7	6	21	14	20
W7526 8-3/8	8	G3/8	27,5	13,7	7	21	19	24
W7526 10-1/4	10	G1/4	32	16,3	6	25	14	26
W7526 10-3/8	10	G3/8	32	16,3	7	25	19	35
W7526 10-1/2	10	G1/2	32	16,3	8	25	24	45
W7526 12-3/8	12	G3/8	36	20	7	31	19	38,5
W7526 12-1/2	12	G1/2	36	20	8	31	24	46
W7526 16-1/2	16	G1/2	59	27	8	38	24	97
W7526 16-3/4	16	G3/4	59	27	9	38	30	99

Reducer junction straight Mod. W7800




Mod.	A	B	G	L	L1	Weight [g]
W7800 4-6	4	6	9,3	30	14,5	2
W7800 4-8	4	8	9,3	31	14,5	2
W7800 6-8	6	8	11,4	32,5	15,5	2,5
W7800 6-10	6	10	11,4	34,5	15,5	2,5
W7800 6-12	6	12	11,4	36	16,5	3
W7800 8-10	8	10	13,7	35,5	16,5	3
W7800 8-12	8	12	13,7	37,5	17,5	3
W7800 10-12	10	12	16,3	39,5	19,5	3,5

Equal junction elbow Mod. W7555




Mod.	A	B	G	L	L1	M	T	Weight [g]
W7555 6-6	6	6	11,4	23	8	19	17,5	2,5
W7555 8-8	8	8	13,7	25	9	21	18,5	3
W7555 10-10	10	10	16,3	29	10	26	21	3,5
W7555 12-12	12	12	20	32	11	31,5	23	6,5

Equal intermediate straight Mod. W7580

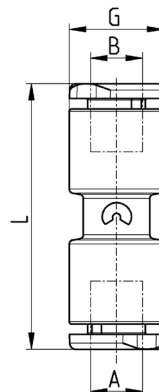


Mod.	A	B	G	L	Weight [g]
W7580 6	6	6	11,4	32	3
W7580 8	8	8	13,7	34,5	4
W7580 10	10	10	16,3	42	5
W7580 12	12	12	20	46	9
W7580 16	16	16	27	60	20

Equal intermediate elbow Mod. W7550

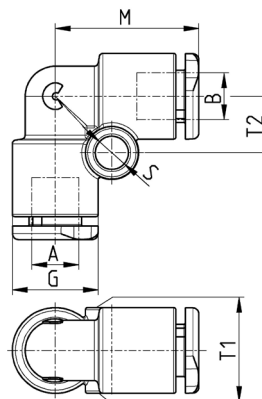


Mod.	A	B	G	M	S	T1	T2	Weight [g]
W7550 6	6	6	11,4	19	4	11,4	7,5	3
W7550 8	8	8	13,7	21	4	13,7	8,5	4
W7550 10	10	10	16,3	26	4,4	16,3	8	5
W7550 12	12	12	20	31,5	4,4	9	9,6	11
W7550 16	16	16	27	38,5	-	-	-	23

Equal intermediate tee Mod. W7540

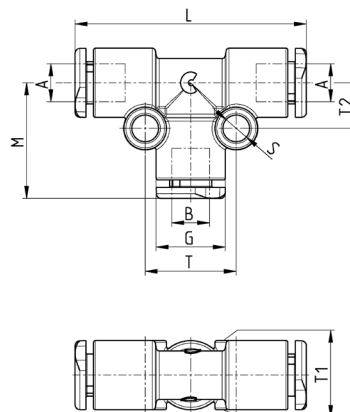

Mod.	A	B	G	L	M	S	T	T1	T2	Weight [g]
W7540 6	6	6	11,4	38	19	4	15	11,4	7,5	6
W7540 8	8	8	13,7	42	21	4	17	13,7	8,5	8
W7540 10	10	10	16,3	52	26	4,4	16	16,3	8	12
W7540 12	12	12	20	63	31,5	4,4	19,2	9	9,6	16
W7540 16	16	16	27	77	38,5	-	-	-	-	32


Reducer intermediate multiple tee Mod. W7545

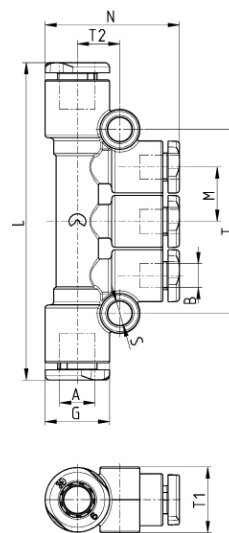

Mod.	A	B	G	L	M	N	S	T	T1	T2	Weight [g]
W7545 8-6	8	6	13,7	65	11,5	27	4	38,2	13,7	9	10
W7545 10-8	10	8	16,3	80,5	14,1	30	4,4	45,8	16,3	10,3	14


GRIPFIT PUSH-IN FITTINGS
SERIES 7000 - COOLING - DIMENSIONS

Equal intermediate Y Mod. W7560

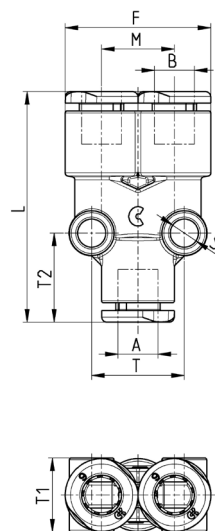



Mod.	A	B	F	L	M	S	T	T1	T2	Weight [g]
W7560 6	6	6	23	36	11,4	4	14,5	11,5	14	9
W7560 8	8	8	27,2	40,5	13,5	4	17	14	15	8
W7560 10	10	10	32,6	49,5	16,3	4,4	16,3	16	14,6	10

Plastic male plug Mod. B6900

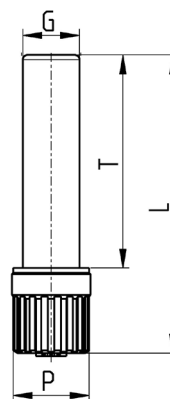

Mod.	G	L	P	T	Weight [g]
B6900 6	6	31,5	8	22,5	1
B6900 8	8	34,5	12	24,5	2
B6900 10	10	37	12	27	2
B6900 12	12	40,5	16	28,5	3

Groove for metal pipe




Made by Camozzi grooving tool 8TRT (or machining)

A	B	C	D	E	F	G	H
5,2	6	6,25	10°	80°	0,5	30°	18
7,2	8	6,4	10°	80°	0,5	30°	20
9,2	10	7,75	10°	80°	0,5	30°	22,5
11,2	12	8,15	10°	80°	0,5	30°	21,5
15,1	16	10,35	10°	80°	0,5	30°	25,5

Made by machining


A	B	C	D	E	F	G	H	L	M	N
6,1	6	4	5,4	2	5,5	0,5x45°	18	75°	45°	0,5
8,1	8	6	6	2	7,5	0,5x45°	20,5	75°	45°	0,5
10,1	10	8	7,5	2	9,5	0,5x45°	23	75°	45°	0,5
12,1	12	10	7,5	2	11,5	0,5x45°	24	75°	45°	0,5
16,1	16	14	12	2	11,5	0,5x45°	32	75°	45°	0,5

Grooving tool for metallic tubes



Mod.	Tube Ø	A [max]	B	C	D	Weight [g]	E [spare wheel]
8TRT 6	6	140	43,5	39	50	450	RTRT 6
8TRT 8	8	143	43,5	39	50	450	RTRT 8
8TRT 10	10	145	44	39	50	450	RTRT 10
8TRT 12	12	147	44,5	39	50	450	RTRT 12
8TRT 16	16	151	45	39	50	450	RTRT 16

Plastic junction Mod. 7950



Mod.	B	L	L1	Weight [g]
7950 6	6	39	15	1
7950 8	8	41	16	1
7950 10	10	44	18,5	1
7950 12	12	49	19	1