

Butterfly Valves - Actuated

Actuated 'Wafer' Type Cast Iron


Cast Iron 'Wafer' Pattern Butterfly Valve with Cast Iron and Stainless Steel Disc options, fitted with Pneumatic Actuator.
For Valve details refer to types 600104 and 600105 on page 298.

Part Number: 8P009700*

8P010100*

8P009800*

8P010200*

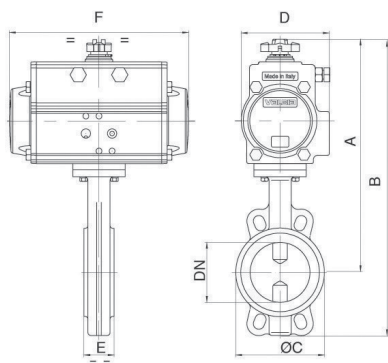

Technical Data

Media

Any application with media suitable to materials of construction

Operating Pressure

16 BAR

Operating Temperature

-10°C to +120°C EPDM

Flange Rate

PN16 / ANSI 150

Materials

For valve details refer to page 298

Additional Options

Limit switch boxes for open/closed position indication.

Actuation fitting conditions.

Fluid H₂O +20°C Actuation 6 bar.

NAMUR solenoid valve

Special Requests

For assistance, contact our technical office or your local Camozzi distributor.

✓ Ex Stock

🔧 UK Assembly

☎ Please Call Sales Office

Valve Mounted on Double Acting Actuator.

Types 8P009700* } GGG 40 Disc
EPDM Liner

8P010100* } CF8M Disc
EPDM Liner

Dimensions (mm)

Size	DN	PN	A	B	ØC	D	E	F	ACT
*07	32	16	224	282	85	71	33	141	DA52
*08	40	16	224	294	95	71	33	141	DA52
*10	50	16	255	326	100	71	43	141	DA52
*12	65	16	267	345	120	71	46	141	DA52
*14	80	16	281	370	127	81	46	164	DA63
*18	100	16	315	417	161	95	52	210	DA75
*19	125	16	327	450	190	95	56	210	DA75
*20	150	16	355	493	215	106	56	241	DA85
*21	200	16	410	578	268	123	60	275	DA100
*77	250	16	471	678	325	137	68	333	DA115
*78	300	16	593	837	400	148	78	372	DA125

Valve Mounted on Single Acting Actuator.

Types 8P009800* } GGG 40 Disc
EPDM Liner

8P010200* } CF8M Disc
EPDM Liner

Dimensions (mm)

Size	DN	PN	A	B	ØC	D	E	F	ACT
*07	32	16	231	290	85	81	33	164	SR63
*08	40	16	235	305	95	81	33	164	SR63
*10	50	16	266	338	100	81	43	164	SR63
*12	65	16	279	357	120	81	46	164	SR63
*14	80	16	312	401	127	106	46	241	SR85
*18	100	16	328	430	161	106	52	241	SR85
*19	125	16	354	477	190	123	56	275	SR100
*20	150	16	366	504	215	123	56	275	SR100
21	200	16	469	637	268	164	60	435	SR140
77	250	16	524	731	325	186	68	500	SR160
78	300	16	565	808	400	186	78	500	SR160

Valve design may vary from type shown

DN32-40 valves only available with Stainless Steel Disc.



Also available in Lugged Pattern