


PLT1 Standard Range - Hydraulic Flat Face Couplings

ISO 16028

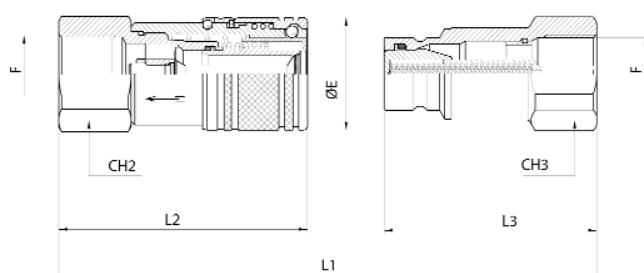

DN Size	Dash	ISO	CH2	CH3	ØE	L1	L2	L3	Thread	Carrier Half	Probe Half
06	04	6.3	22	22	28	101.5	58.5	53.5	1/4	PLT1.0606.002	PLT1.0606.003
13	06	10	27	27	32	116	67.5	63.5	3/8	PLT1.1310.002	PLT1.1310.003
13	06	10	27	27	32	125	72.5	67.5	1/2	PLT1.1313.002	PLT1.1313.003
20	08	12.5	36	36	38	138.5	78.5	72	3/4	PLT1.2019.002	PLT1.2019.003
25	12	19	46	41	48	157.5	94	86	3/4	PLT1.2519.002	PLT1.2519.003
25	12	19	46	41	48	157.5	94	86	1	PLT1.2525.002	PLT1.2525.003
30	16	25	50	50	55	177	109.5	90	1 1/4	PLT1.3031.002	PLT1.3031.003
39	24	40	70	70	79	210	118.5	119.5	1 1/2	PLT1.3939.002	PLT1.3939.003
50	32	50	80	70	103	290	147.5	119.5	2	PLT1.5051.112	PLK4.5051.113

Technical Data

Characteristics

Easy connection and disconnection by pushing the two halves together with one hand only. The locking sleeve is provided with safety-system which makes sure a perfect connection and prevents accidental disconnection. Dimension 13 (DN13) conforms to HTMA specifications. All dimensions conform to ISO 16028 standard.

Threads

BSP
NPT on request

Materials

See page 8.00/002

Operating and Burst Pressures

See table page 8.00/002

Operating Temperature

NBR standard seals -25°C to +125°C

Special Requests

For assistance, contact our technical office or your local Camozzi distributor.

Other seals available on request.

8

Dust Caps for Flat Face Couplings

Dust Caps - for Flat Face Couplings

DIN	Thread	for Carrier	for Probe
06	1/4	PLUG SPLT.06002	CAP SPLT.06003
13	3/8	PLUG SPLT.13002	CAP SPLT.13003
13	1/2	PLUG SPLT.13002	CAP SPLT.13003
20	3/4	PLUG SPLT.20002	CAP SPLT.20003
25	1	PLUG SPLT.25002	CAP SPLT.25003
30	1 1/4	PLUG SPLT.30002	CAP SPLT.30003

