


CODING EXAMPLE

| | | | | | | |
|-----------------|---|-----------|---|------------|---|-------------------|
| NPF | - | FM | - | 1/4 | - | M10 X 1,25 |
| NPF | SERIES NPF = Flexible suction pad mountings | | | | | |
| FM | THREAD VERSION FM = G1 Female / G2 Male | | | | | |
| 1/4 | FEMALE THREAD G1 1/4 = G1/4 | | | | | |
| M10x1,25 | MALE THREAD G2 M10x1,25 = M10x1,25 1/4 = G1/4 | | | | | |

Flexible suction pad mountings Series NPF



- * G1 = Female thread (F)
- ** G2 = Male thread (M)

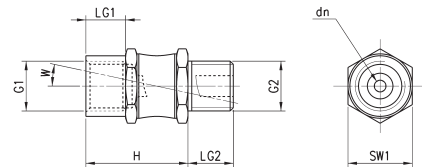

| DIMENSIONS | | | | | | | | | | | | |
|----------------------------|-----|--------|------------|----|------|-----|-----|------|-------------------|---------------------|------------|--|
| Mod. | dn | G1 * | G2 ** | H | LG1 | LG2 | SW1 | W(°) | Vertical load (N) | Bending moment (Nm) | Weight (g) | |
| NPF-FM-1/4-M10X1,25 | 2,8 | G1/4 F | M10X1,25 M | 27 | 10,5 | 8 | 17 | 12 | 500 | 8 | 26 | |
| NPF-FM-1/4-1/4 | 3 | G1/4 F | G1/4 M | 27 | 12 | 12 | 17 | 12 | 750 | 10 | 30 | |