


GRIPFIT PUSH-IN FITTINGS

SERIES 7000 - MEDICAL

Tube external diameters: 4, 6, 8, 10 mm
Fittings threads: ISO-228 BSPP (G1/8, G1/4),
ISO-965 Metric parallel (M5).

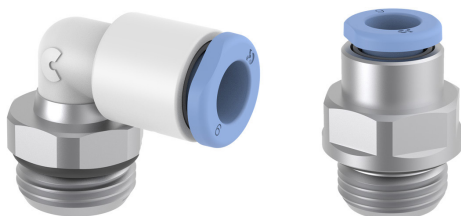

- Oxygen compatibility according to ASTM G93/G93M -19
- Excellent resistance to humidity absorption
- Excellent chemical resistance

Series 7000 Medical push-in fittings are designed for the Life Science market, particularly for medical and analytical applications. These fittings are mainly made from bio-based materials and are compatible with most medical gases and fluids.



ISO 14743:2020



Reach




RoHS

ASTM G93/
G93M-19

General Data

Diameter		Ø4 mm	Ø6 mm	Ø8 mm	Ø10 mm
Maximum working pressure	- 20° / + 40°	16 bar	16 bar	16 bar	16 bar
	+ 40° / + 70°	16 bar	14 bar	12 bar	12 bar
	+ 70° / + 100°	16 bar	12 bar	10 bar	10 bar
Minimum working pressure	-0,9 bar				
Temperature	-20 ÷ +100 (See characteristics of tubes used)				
Threads	GAS cylindrical ISO-228 BSPP ISO-965 Metric parallel				
Connecting tube	Polyamide (PA 6- PA11 - PA12), Polyurethane (PU), Fluoropolymer (FEP), rigid metal pipe with smooth grooved metal end				
Fluid	Oxygen and medical gases (for other fluids consult our technicians)				
Materials	(A) Body = Technopolymer (PA11), Brass with chemical nickel plating				
	(B) Button = Technopolymer (PA66)				
	(C) Gripping ring = Stainless steel (AISI 301)				
	(D) Seals = EPDM				
	(E) Thread = Brass with chemical nickel plating				

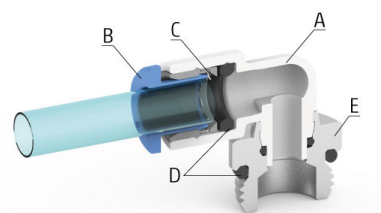


GRIPFIT PUSH-IN FITTINGS
SERIES 7000 - MEDICAL - DIMENSIONS

Male straight Mod. W6512 OX1

News



Chemical nickel-plated brass
Thread metric parallel ISO-965 and BSPP ISO-228




Mod.	A	D	C	F	G	H	L	SW	SW1	Weight [g]
W6512 4-M5-OX1	4	M5x0,8	14,6	8,8	9,9	4	20,5	9	2	3
W6512 4-1/8-OX1	4	G1/8	14,6	8,8	13,5	6	20	12	2,5	8
W6512 6-M5-OX1	6	M5x0,8	15,5	11,7	13,2	4	21,5	12	2	6
W6512 6-1/8-OX1	6	G1/8	15,5	11,7	13,5	6	21	12	4	8
W6512 6-1/4-OX1	6	G1/4	15,5	11,7	16,4	7	22	15	4	11
W6512 8-1/8-OX1	8	G1/8	16,8	13,7	15,2	6	25,2	14	5	12
W6512 8-1/4-OX1	8	G1/4	16,8	13,7	16,4	7	24	15	6	14
W6512 10-1/4-OX1	10	G1/4	19	15,9	18,5	7	28,5	17	7	22,5

Swivel male elbow Mod. W7522 OX1


News

Thread metric parallel ISO-965 and BSPP ISO-228




Mod.	A	D	E	G	H	M	SW	Weight [g]
W7522 4-M5-OX1	4	M5x0,8	8,2	9,2	3,5	17,5	9	4
W7522 4-1/8-OX1	4	G1/8	9	9,2	5	17,5	12	7
W7522 6-M5-OX1	6	M5x0,8	9,2	11,4	3,5	19	9	5
W7522 6-1/8-OX1	6	G1/8	10	11,4	5	19	12	8
W7522 6-1/4-OX1	6	G1/4	10	11,4	6	19	14	11
W7522 8-1/8-OX1	8	G1/8	13,5	13,7	5	21	12	11
W7522 8-1/4-OX1	8	G1/4	12	13,7	6	21	14	14
W7522 10-1/4-OX1	10	G1/4	14,5	16,3	6	25	14	16

Plug-in reducer Mod. W7800 OX1




Mod.	A	B	G	L	L1	Weight [g]
W7800 4-6-OX1	4	6	9,3	30	14,5	2
W7800 4-8-OX1	4	8	9,3	31	14,5	3
W7800 6-8-OX1	6	8	11,4	32,5	15,5	4
W7800 6-10-OX1	6	10	11,4	34,5	15,5	6,5
W7800 8-10-OX1	8	10	13,7	36	17	7

Plug-in elbow Mod. W7555 OX1

News


Mod.	A	B	G	L	L1	M	T	Weight [g]
W7555 4-4-OX1	4	4	9,2	21	7	19	16,5	2
W7555 6-6-OX1	6	6	11,4	23	8	19	17,5	2,5
W7555 8-8-OX1	8	8	13,7	25	9	21	18,5	3
W7555 10-10-OX1	10	10	16,3	29	10	26	21	3,5


Equal union Mod. W7580 OX1




Mod.	A	B	G	L	Weight [g]
W7580 4-OX1	4	4	9,2	30	2
W7580 6-OX1	6	6	11,4	32	3
W7580 8-OX1	8	8	13,7	34,5	4
W7580 10-OX1	10	10	16,3	42	5

FITTINGS, CONNECTORS AND TUBES


Equal union elbow Mod. W7550 OX1

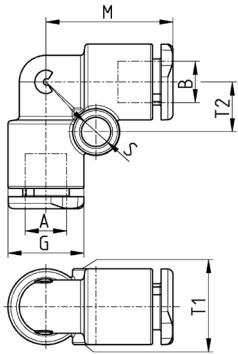

Mod.	A	B	G	M	S	T1	T2	Weight [g]
W7550 4-OX1	4	4	9,2	17,5	4	9,2	6,5	2
W7550 6-OX1	6	6	11,4	19	4	11,4	7,5	3
W7550 8-OX1	8	8	13,7	21	4	13,7	8,5	4
W7550 10-OX1	10	10	16,3	26	4,4	16,3	8	5


Equal union tee Mod. W7540 OX1
News


Mod.	A	B	G	L	M	S	T	T1	T2	Weight [g]
W7540 4-OX1	4	4	9,2	35	17,5	4	12	9,2	6,5	4
W7540 6-OX1	6	6	11,4	38	19	4	15	11,4	7,5	6
W7540 8-OX1	8	8	13,7	42	21	4	17	13,7	8,5	8
W7540 10-OX1	10	10	16,3	52	26	4,4	16	16,3	8	12

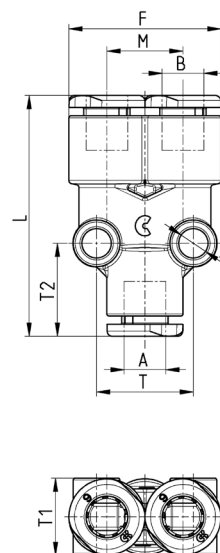Equal union Y Mod. W7560 OX1
News



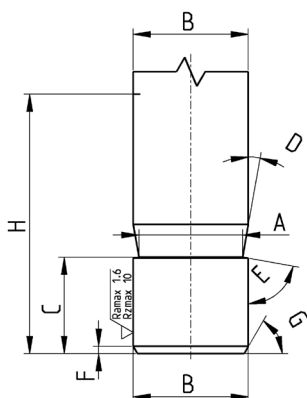
Mod.	A	B	F	L	M	S	T	T1	T2	Weight [g]
W7560 4-OX1	4	4	18,2	34,2	9	4	10,8	9,5	13	5
W7560 6-OX1	6	6	23	36	11,4	4	14,5	11,5	14	6
W7560 8-OX1	8	8	27,2	40,5	13,5	4	17	14	15	8
W7560 10-OX1	10	10	32,6	49,5	16,3	4,4	16,3	16	14,6	10

Plastic male plug Mod. B6900



Mod.	G	L	P	T	Weight [g]
B6900 4	4	29	8	20	1
B6900 6	6	31,5	8	22,5	1
B6900 8	8	34,5	12	24,5	2
B6900 10	10	37	12	27	2

Groove for metal pipe




Made by Camozzi grooving tool 8TRT (or machining).

A	B	C	D	E	F	G	H
3,4	4	7	10°	80°	0,5	30°	16,5
5,2	6	6,25	10°	80°	0,5	30°	18
7,2	8	6,4	10°	80°	0,5	30°	20
9,2	10	7,75	10°	80°	0,5	30°	22,5

Made by machining.


A	B	C	D	E	F	G	H	L	M	N
4,1	4	2	6	2	3,5	0,5x45°	16,5	75°	45°	0,5
6,1	6	4	5,4	2	5,5	0,5x45°	18	75°	45°	0,5
8,1	8	6	6	2	7,5	0,5x45°	20,5	75°	45°	0,5
10,1	10	8	7,5	2	9,5	0,5x45°	23	75°	45°	0,5

Grooving tool for metallic tubes Mod. 8TRT

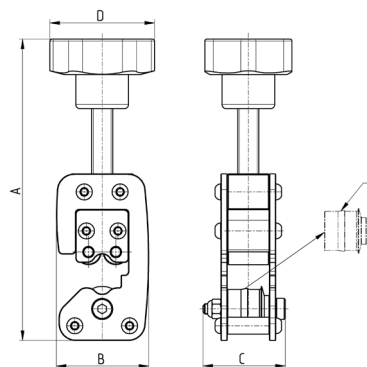

Mod.	Tube Ø	A [max]	B	C	D	Weight [g]	E [spare wheel]
GTRT 4	4	138	43,5	39	50	450	RGTRT 4
8TRT 6	6	140	43,5	39	50	450	RTRT 6
8TRT 8	8	143	43,5	39	50	450	RTRT 8
8TRT 10	10	145	44	39	50	450	RTRT 10

Fittings Mod. 7950



Mod.	B	L	L1	Weight [g]
7950 4	4	37	14	1
7950 6	6	39	15	1
7950 8	8	41	16	1
7950 10	10	44	18,5	1