


# PLTX Stainless Steel Range - Hydraulic Flat Face Couplings

ISO 16028

HYDRAULIC COUPLINGS

8

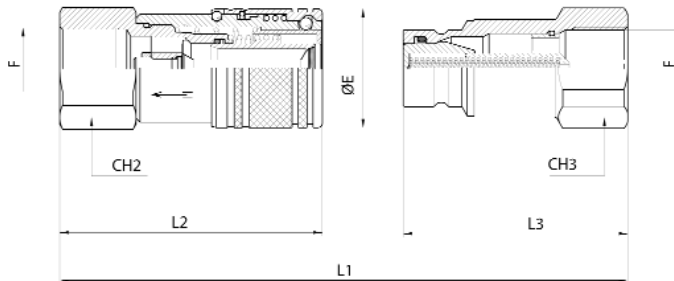

**Technical Data**

**Characteristics**

Easy connection and disconnection by pushing the two halves together with one hand only. The locking sleeve is provided with safety-system which makes sure a perfect connection and prevents accidental disconnection. Dimension 13 (DN13) conforms to HTMA specifications. All dimensions conform to ISO 16028 standard.

**Threads**

BSP  
NPT on request

**Materials**

See page 8.00/002

**Operating and Burst Pressures**

See table page 8.00/002

**Operating Temperature**

with Viton seals -25°C to +200°C

**Special Requests**

For assistance, contact our technical office or your local Camozzi distributor.



See 8.00 page 003 for Dust Caps

DN	Dash Size	ISO	CH2	CH3	øE	L1	L2	L3	Thread	Carrier Half	Probe Half
06	04	6.3	22	22	28	108	59	60	1/4	PLTX.0606.112	PLTX.0606.113
13	06	10	27	27	32	126.5	73	69.5	3/8	PLTX.1310.112	PLTX.1310.113
13	06	10	27	27	32	126	73	69	1/2	PLTX.1313.112	PLTX.1313.113
20	08	12.5	36	36	38	151	87	81.5	1/2	PLTX.2019.112	PLTX.2019.113
20	08	12.5	36	36	38	152.5	87	83	3/4	PLTX.2019.112	PLTX.2019.113
22	10	16	36	36	42	151.5	86	83	3/4	PLTX.2019.112	PLTX.2019.113
25	12	19	41	41	48	166	97.5	90.5	1	PLTX.2525.112	PLTX.2525.113
30	16	25	50	50	55	181.5	109.5	95	1 1/4	PLTX.3031.112	PLTX.3031.113
39	24	40	70	70	79	202	118	112.5	1 1/2	PLTX.3939.112	PLTX.3939.113
50	32	50	80	80	99	259	149	148	2	PLTX.5051.112	PLTX.5051.113