

# Series FVD inline vacuum filters

For use in vacuum systems with minor to medium levels of dirt.  
Direct mounting on the suction pad.



- » Hose connection and blocking nut
- » Transparent body with an arrow indicating the flow direction
- » Replaceable filter element
- » Transparent cartridge to check the filter's conditions

These filters can be mounted directly on the suction pad.  
The filter element can be easily substituted and its conditions can be checked thanks to its transparent wrapping.

## GENERAL DATA

**Description** Inline filter  
**Materials** - body in technopolymer  
 - cloth filter


**CODING EXAMPLE**

<b>FVD</b>	-	<b>6/4</b>	-	<b>50</b>
------------	---	------------	---	-----------

<b>FVD</b>	SERIES: FVD = inline filter
<b>6/4</b>	CONNECTIONS: 6/4 = tube 6 8/6 = tube 8
<b>50</b>	FILTER ELEMENT: 50 = 50 µm


SERIES FVD INLINE VACUUM FILTERS

**TECHNICAL DATA**



TECHNICAL DATA						
Mod.	Filter element (µm)	Nominal flow (l/min)	Max vacuum (mbar)	Max pressure at 25°C (bar)	Max pressure at 50°C (bar)	Weight (kg)
FVD-6/4-50	50	32	-990	7	5	0,006
FVD-8/6-50	50	66	-990	7	5	0,010

## Series FVD inline filter

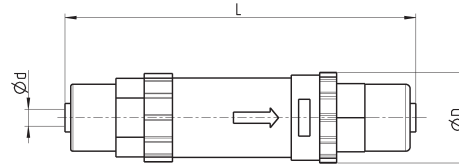

DIMENSIONS			
Mod.	d	D	L
FVD-6/4-50	6	16	61
FVD-8/6-50	8	23	68