

Dust Caps and Plugs for ISO A

- ✓ Ex Stock
- ✎ UK Assembly
- ☎ Please Call Sales Office

Dust Caps - for ISO 'A' Series					
DN	Carrier Half		Probe Half		
06	SPAV.06002	✓	SPAV.06003	✓	
10	SPAV.10002	✓	SPAV.10003	✓	
13	SPAV.13002	✓	SPAV.13003	✓	
20	SPAV.20002	✓	SPAV.20003	✓	
25	SPAV.25002	✓	SPAV.25003	✓	
30	SPAV.30202	✓	SPAV.30203	✓	
39	SPAV.39202	✓	SPAV.39203	✓	
50	SPAV.50202	✓	SPAV.50203	✓	




Cap

Plug

CAM IA (F/M) Range - Hydraulic Quick Release Couplings

ISO A Norm

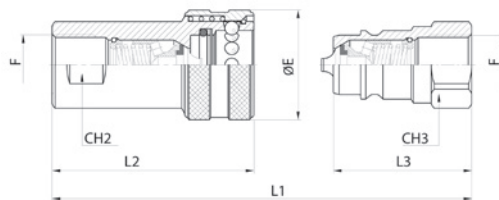

Technical Data

Threads

BSP

Materials

See page 322

Operating Temperature

-30°C up to +110°C

Special Requests

For assistance, contact our technical office or your local Camozzi distributor.



See above Dust Caps

- ✓ Ex Stock
- ✎ UK Assembly
- ☎ Please Call Sales Office

Nominal Size		Max Working Pressure (bar)	Rated Flow (l/min)	Min. Burst Pressure			Fluid Spillage (CC)
ISO	mm			Male (bar)	Female (bar)	Coupled (bar)	
6.3	04	350	5	2000	1500	1500	0.7
10	06	350	35	1400	1500	1500	1.4
12.5	08	300	75	1250	1500	1500	1.8
20	12	250	147	1000	1200	1000	7
25	16	250	250	1000	1000	1000	11

F	ISO	CH2	CH3	ØE	L1	L2	L3	Carrier Half Part Number		Probe Half Part Number	
1/4"	6.3	17	17	24	69.1	48.8	34.5	CAM IAF 0404	✓	CAM IAM 0404	✓
3/8"	10	22	22	30	80.3	57.8	40	CAM IAF 0606	✓	CAM IAM 0606	✓
1/2"	12.5	27	27	38	90.2	67	45	CAM IAF 0808	✓	CAM IAM 0808	✓
3/4"	20	34	34	45	113.3	83.5	56.5	CAM IAF 1212	✓	CAM IAM 1212	✓
1"	25	41	41	52	129.7	97.9	64.5	CAM IAF 1616	✓	CAM IAM 1616	✓